


FSD Serie FF6

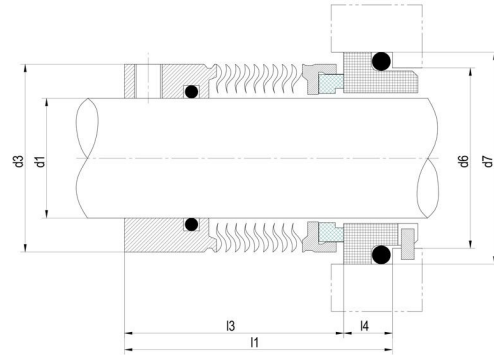

Type FF6 Dimensional Data (millimeter)						
d1	d3	l3	d7	l4	d6	l1
18	34.00	27.50	33.00	10.00	27.00	37.50
20	38.20	27.50	35.00	10.00	29.00	37.50
22	38.20	27.50	37.00	10.00	31.00	37.50
24	38.20	30.00	39.00	10.00	33.00	40.00
25	40.10	30.00	40.00	10.00	34.00	40.00
28	42.00	32.50	43.00	10.00	37.00	42.50
30	44.00	32.50	45.00	10.00	39.00	42.50
32	46.10	32.50	48.00	10.00	42.00	42.50
33	47.50	32.50	48.00	10.00	42.00	42.50
35	49.50	32.50	50.00	10.00	44.00	42.50
38	53.00	34.00	56.00	11.00	49.00	45.00
40	56.00	34.00	58.00	11.00	51.00	45.00
43	59.00	34.00	61.00	11.00	54.00	45.00
45	59.00	34.00	63.00	11.00	56.00	45.00
48	62.00	34.00	66.00	11.00	59.00	45.00
50	65.10	34.50	70.00	13.00	62.00	47.50
53	69.00	34.50	73.00	13.00	65.00	47.50
55	71.00	34.50	75.00	13.00	67.00	47.50
58	74.00	39.50	78.00	13.00	70.00	52.50
60	75.00	39.50	80.00	13.00	72.00	52.50
63	81.00	39.50	83.00	13.00	75.00	52.50
65	85.00	39.50	85.00	13.00	77.00	52.50
68	86.00	37.20	90.00	15.30	81.00	52.50
70	87.00	44.70	92.00	15.30	83.00	60.00
75	95.00	44.70	97.00	15.70	88.00	60.00
80	99.00	44.30	105.00	15.70	95.00	60.00
85	104.50	44.30	110.00	15.70	100.00	60.00
90	108.00	49.30	115.00	15.70	105.00	65.00
95	114.30	49.30	120.00	15.70	110.00	65.00
100	120.50	49.30	125.00	15.70	115.00	65.00

CHARACTERISTICS

- Single Spring Seal
- Metal Bellow Seal
- Double Directional
- Unbalanced
- According to DIN 24960

LIMIT OF APPLICATIONS

- Pressure : 20 bar
- Temperature : - 20 ~ 220 °C
- Speed : 20 m/s

MATERIALS

- Rotary Face : Car, SiC, TC
- Stationary Face: SiC, TC
- Secondary Seal : NBR, EPDM, VITON, FEP, KALREZ
- Springs : AM 350, HC276
- Other Parts : SS314